



WIRING INSTRUCTIONS

GM 1963-71 Externally Regulated 10DN Style Alternator


Part #'s 7102, 17102, 17102-360, 27102

Tech Dept.


(630) 957-4019

Tech@powermasterperformance.com

Warning: This unit is intended for use as an OE style replacement and **NOT** for use with added electrical load such as electric fans, EFI, & stereo. For upgrade units see our catalog or give us a call at 630-957-4019

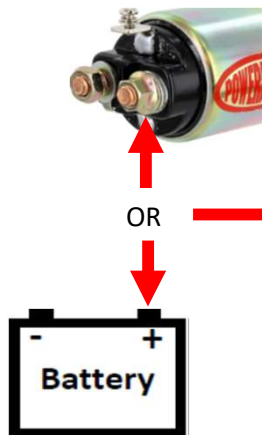

Note: Voltage on these units is controlled by the external Regulator

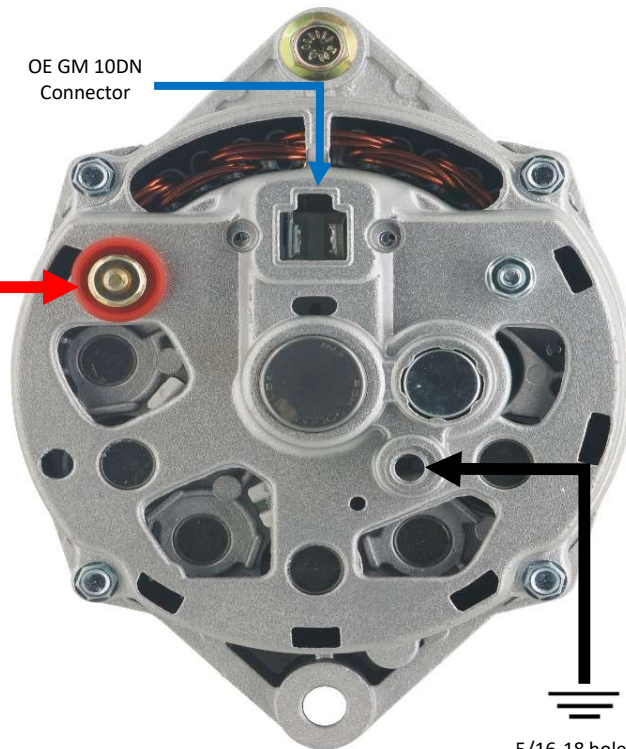

5/16-18 hole for
Ground Strap

Disconnect Battery Negative (-)

READ ALL INSTRUCTIONS IN BOX!

Charge Wires:

100 Amp Alt. use Minimum 8 gauge up to 6ft.

Alternator Ground: Many mounting brackets are powder/clear coated, painted, or plated. The Alternator will NOT ground properly without a ground wire from the Alt. housing to the engine block. (This wire should match charge wire size)

Battery must have a clean ground to the engine block.

Wire Connections: Be sure all terminals are crimped securely, and connections are clean and tight.

Belt Tension: Inspect belt for signs of cracking or glazing. Replace if needed. **A loose belt will cause intermittent charging and generate excessive heat resulting in premature unit/bearing failure.**

For V belt units follow attached pulley tag.

A fully charged battery is at least 12.6V, not 12.0V
A weak/defective battery will cause premature failure.
Never disconnect the battery with engine running! this causes voltage spikes that will damage the alternator

DO NOT EXCEED 18,000 ALTERNATOR SHAFT RPM
(see catalog pg.45 for more info)

**FAILURE TO FOLLOW THESE INSTRUCTIONS MAY
VOID YOUR WARRANTY**



WIRE! RIGHT!

The Powermaster Cables are made up of hundreds and even thousands of strands of **pure copper** wire. This ensures that more current can be transferred efficiently with less heat build-up and loss.

The cables meet American Wire Gauge specs and are **made in the USA** and are finished with machine crimped ring lug terminals.

- *Fine strands of pure, oxygen-free copper wire*
- *Extremely flexible for easy routing*
- *Durable sleeve designed for underhood environments*
- *Available in 0-8 gauge diameters from 1-12 feet lengths*
- *Hydraulically terminated eyelet terminals*

630-957-4019 OR

TECH@POWERMASTERPERFORMANCE.COM



Custom Charge & Ground Cables

No matter what you're working on, we have a charge and ground cable available! Below are the different lengths and gauges of cable available. Each cable is finished with a 1/4" or 5/16" ring lug while ground cables feature a 5/16" and 3/8" combination.



Red Charge Wire	1'	2'	3'	4'	5'	6'	7'	8'	10'	12'
8-Gauge, 1/4" and 5/16" Terminals Installed		1-582-130	1-583-130	1-584-130	1-585-130	1-586-130	1-587-130	1-588-130		
6-Gauge, 1/4" and 5/16" Terminals Installed		1-562-130	1-563-130	1-564-130	1-565-130	1-566-130	1-567-130	1-568-130	1-5610-130	
4-Gauge, 1/4" and 5/16" Terminals Installed		1-542-130	1-543-130	1-544-130	1-545-130	1-546-130	1-547-130	1-548-130	1-5410-130	1-5412-130
2-Gauge, 1/4" and 5/16" Terminals Installed		1-522-130	1-523-130	1-524-130	1-525-130	1-526-130	1-527-130	1-528-130	1-5210-130	1-5212-130
0-Gauge, 1/4" and 5/16" Terminals Installed		1-502-130	1-503-130	1-504-130	1-505-130	1-506-130	1-507-130	1-508-130	1-5010-130	1-5012-130
8-Gauge, 5/16" Terminals on both ends Installed		1-582	1-583	1-584	1-585	1-586	1-587	1-588		
6-Gauge, 5/16" Terminals on both ends Installed		1-562	1-563	1-564	1-565	1-566	1-567	1-568	1-5610	
4-Gauge, 5/16" Terminals on both ends Installed		1-542	1-543	1-544	1-545	1-546	1-547	1-548	1-5410	1-5412
2-Gauge, 5/16" Terminals on both ends Installed		1-522	1-523	1-524	1-525	1-526	1-527	1-528	1-5210	1-5212
0-Gauge, 5/16" Terminals on both ends Installed		1-502	1-503	1-504	1-505	1-506	1-507	1-508	1-5010	1-5012

Black Ground Wire	1'	2'	3'							
8-Gauge, 5/16" and 3/8" Terminals Installed	1-781	1-782	1-783							
6-Gauge, 5/16" and 3/8" Terminals Installed	1-761	1-762	1-763							
4-Gauge, 5/16" and 3/8" Terminals Installed	1-741	1-742	1-743							
2-Gauge, 5/16" and 3/8" Terminals Installed	1-721	1-722	1-723							
0-Gauge, 5/16" and 3/8" Terminals Installed	1-701	1-702	1-703							
Ground Strap	1'									
Ground Strap, 1" wide, 1' long, 5/16" and 3/8" Terminal Installed	1-711									

AMP LOAD	CHARGE WIRE LENGTH		
	1'-6"	7'-13"	14'-20"
50-100	8g	6g	4g
100-150	6g	4g	2g
150-220	4g	2g	0g
220+	2g	0g	1/0g

! WARNING: Cancer or Reproductive Harm
www.P65warnings.ca.gov